COLOMER & SONS

Multi purpose Rotating Bezel

(A) Pusher "Month adjusting"

Minute hand
Hour hand
Day display
Month display
Day and Night display
Second hand

Time adjusting
Day & Date adjusting
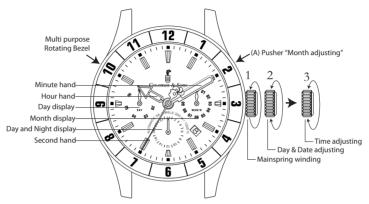Mainspring winding

1) START
Being an automatic watch we suggest you wind it up completely the first time you use it (Position 1) Unscrew the crown and in this position rotate the crown will need to be wound manually 15 – 20 times to develop a sufficient power reserve to ensure the accuracy of the timepiece. You do not have to repete this action every day while the watch is in use, the watch will charge itself automatically.

2) ADJUSTING DAY
Adjust the day by rotating the crown counter-clockwise in "2" position.

3) ADJUSTING DATE
Adjust the date by rotating the crown clockwise in "2" position.

4) ADJUSTING TIME
Rotate the crown in "3" position and adjust the standard time. Then check if it is morning or afternoon and adjust correctly.

5) ADJUSTING MONTH
Push the button "A" and adjust the month.
If the button is not pushed to the end, the month is not changed perfectly.

- Important: After any operation make sure to screw the crown back to normal position 1 perfectly straight and closed. If the crown is not perfectly closed and straight it might be possible that water could enter into the watch.

Multifuction bezel - Modelo: Ocean Multifunction

The Rotating bezel can be used for diferent purposes:
Option 1: can be used to set a second time zone.
Option 2: can be used to set a point in time when you went under water diving purposes.
Here is an example of usage as a second time zone:
1. (C) Centre dial indicates local time.
2. (D) Rotating bezel indicates the second time zone at home.
Example: When you wish to know the time in Madrid while you are staying in Hong Kong and current local time is 2:00 PM - Note that you need to know in advace how many hours difference are in between the two cities. In our example Hong Kong is + 6 hours difference in summer time and + 7 hours in winter time difference to Madrid. Therefore 2:00 PM in Hong Kong will be 7 AM in Madrid taking in cosideration the winter time difference.
*(D) Rotate bezel to position 7 AM hours (winter time)
Now both time zones local and home are set and you don't have to change the position of the bezel while you are in Hong Kong, when the hour hand moves to 3 PM Local time then the time in Madrid will be 8 AM and so on.

*Rotate bezel 7 dots from reference 12 hour point
2:00 PM in Hong Kong will be 7 AM in Madrid

(D) Second Time Zone at Home Rotating Bezel

(C) Local Time Zone